

## ⚠ 保修声明/Warranty Terms

一、对所售产品提供1年期免费质保,即1年内,如产品存在质量问题,可免费更换维修。非质量问题及过保,所进行的维修更换将收取合理费用。

二、以下非本公司因素造成的产品问题均不在免费维修范围:

1. 未按说明书操作使用、电压不匹配、缺少必要的保养等;
2. 落水、受潮、未提供应有的工作环境的;
3. 人为因素所造成的产品损坏;
4. 非我司产品本身导致的故障;

由于国家或地区不同,部分权利可能只适用于特定客户。

I. The products sold are guaranteed for one year free of charge, that is, within one year, if there is any quality problem of the products, they can be replaced or repaired for free. A reasonable fee will be charged for maintenance and replacement of non-quality issues and after warranty overruns.

II. The following product problems not caused by the company are not covered by free maintenance:

1. Not operating according to the manual, voltage mismatch, lack of necessary maintenance, etc.;
2. Falling into the water, being exposed to moisture and failing to provide a proper working environment;
3. Product damage caused by human factors;
4. Failure not caused by our products; Depending on the country or region, some rights may only apply to specific customers.

## ⚠ 安全注意事项/Safety precautions

1. 本产品不具有防水功能。
2. 本产品环境使用温度,请保持在0~35℃的温度范围内。
3. 安装使用时,请不要过度用力或错误用力操作。
4. 严禁在电源不稳定的地方使用本产品。
5. 使用中和关闭电源后的短时间内表面温度较高,请勿随意触碰。
6. 严禁对电源线进行过度弯曲捆绑等。
7. 在开灯的状态下,请勿直视led灯珠。
8. 开灯的时候,会出现短暂的延迟,此为正常现象。
9. 电子镇流器在使用时,会出现正常的工作音,此为正常现象。
10. 请注意保持灯具干净整洁,避免水渍腐蚀灯具。
11. 长时间不使用的情况下,请将其放置在干燥通风处。
12. 此灯具的光源是不可替换的;当光源到其寿终时,应替换整个灯具。
13. 此灯具的外部软缆或软线不能替换;如果软线损坏,该灯具即应报废。

1. This product is not waterproof.
2. Please keep the external operating temperature of this product within the range of 0 ~ 35°C.
3. During installation and use, please do not use excessive force or wrong force.
4. Please do not install it near other electrical appliances.
5. High surface temperature in a short period of time after use and power off. Do not touch it at will. Please wait for it to cool completely before carrying out relevant operation.
6. Excessive bending and binding of the power cord is strictly prohibited. If the power cord is damaged (exposed wire, broken wire, etc.), please stop using it immediately.
7. Do not look at the led light directly when it's working.
8. Turn on the light, there will be a short delay, this is a normal phenomenon.
9. When the electronic ballast is working there will be a little sound.
10. Please pay attention to keep the lamps and lanterns clean and tidy, water stains corrosion lamps and lanterns.
11. If it is not used for a long time, please place it in a dry and ventilated place.
12. The light source of this lamp is not replaceable; when the light source reaches the end of its life, the whole luminaire should be replaced.
13. The external cable or cord of the lamp cannot be replaced; if the cord is damaged, the lamp should be scrapped.

**合格证**  
Certificate of  
conformity

合格证作为售后保修唯一凭证,请保存好!  
Certificate as after-sales warranty only credentials, please keep it good!

检验员/Inspector:

日期/Date:

**保修记录**  
Records of the warranty

送修日期 Maintenance date:	故障及处理方法 Failure and treatment	取货日期 pickup date	顾客签名 Customer signature




# WEEK AQUA 灯架使用说明书 Bracket User Manual

专利号Patent No.  
ZL 2017 3 0485635.X


## △ 单臂灯架型号/L-STAND Model

产品名称 Product name	颜色 Colour	型号 Model	尺寸 Size	适用鱼缸 Tank size
单臂灯架16 银	Silver	DJ-L-16S	520x300x100mm	≤15厚夹口
单臂灯架16 黑	Black	DJ-L-16B	520x300x100mm	≤15厚夹口
单臂灯架20 银	Silver	DJ-L-20S	520x300x100mm	≤20厚夹口
单臂灯架20 黑	Black	DJ-L-20B	520x300x100mm	≤20厚夹口

## △ 单臂灯架尺寸/Size

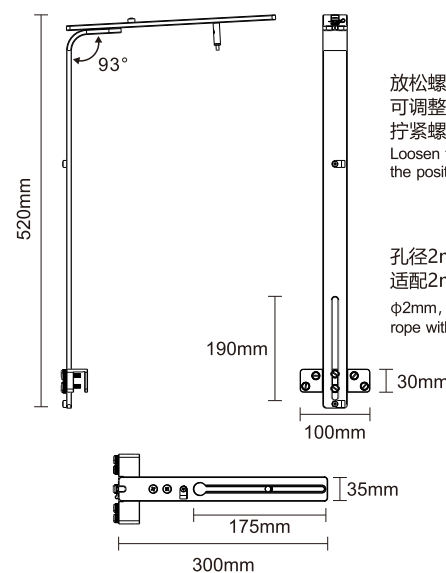


## △ 单臂灯架安装/Installation

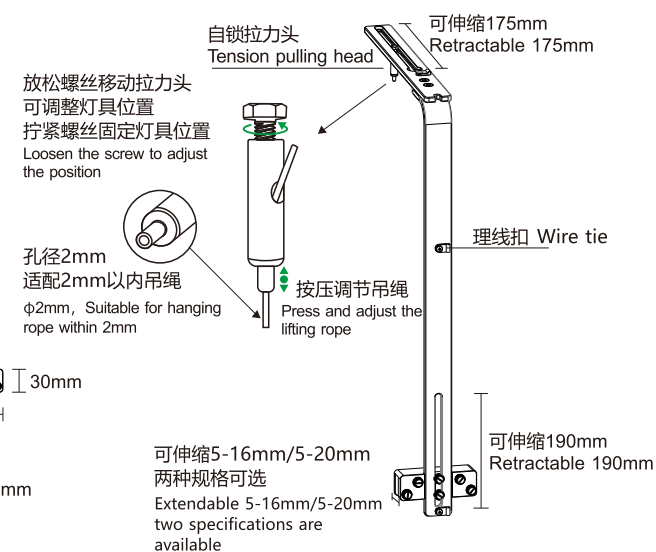

## △ 吊装灯架型号/S-SATND Model


产品名称 Product name	型号 Model	尺寸 Size	适用鱼缸 Tank size
吊装灯架16-银-标配	DJ-S-16S-D0	370x260x80mm	≤15厚夹口
吊装灯架16-银-双吊	DJ-S-16S-D1	370x260x80mm	≤15厚夹口
吊装灯架16-银-单吊	DJ-S-16S-D2	370x260x80mm	≤15厚夹口
吊装灯架16-银-吊绳	DJ-S-16S-DS	370x260x80mm	≤15厚夹口
吊装灯架20-银-标配	DJ-S-20S-D0	370x260x80mm	≤20厚夹口
吊装灯架20-银-双吊	DJ-S-20S-D1	370x260x80mm	≤20厚夹口
吊装灯架20-银-单吊	DJ-S-20S-D2	370x260x80mm	≤20厚夹口
吊装灯架20-银-吊绳	DJ-S-20S-DS	370x260x80mm	≤20厚夹口

## △ 吊装灯架尺寸/Size




## △ 吊装灯架安装/Installation

### (标配)吊装灯架 (双)吊装灯架 (单)吊装灯架 (吊绳款)吊装灯架

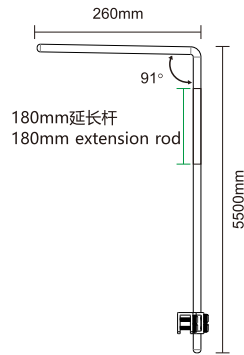


## △ 龙门式不锈钢灯架型号/Longmen style bracket Model

产品名称 Product name	型号 Model	尺寸 Size	适用鱼缸 Tank size
龙门式灯架45	DJ-L-L45	530x530x80mm	≤15厚夹口
龙门式灯架60	DJ-L-L60	680x530x80mm	≤15厚夹口
龙门式灯架90	DJ-L-L90	980x530x80mm	≤15厚夹口
龙门式灯架120	DJ-L-L120	1280x530x80mm	≤15厚夹口
龙门式灯架150	DJ-L-L150	1580x530x80mm	≤15厚夹口
龙门式灯架180	DJ-L-L180	1880x530x80mm	≤15厚夹口




扭开螺钉上下拉动灯架  
可以调节灯具高度  
The height of lamps and lanterns can be adjusted by pulling the screw up and down



松开固定螺丝可调节长度  
Loosen the fixing screw to adjust the length.


## △ 龙门式不锈钢灯架尺寸/Size

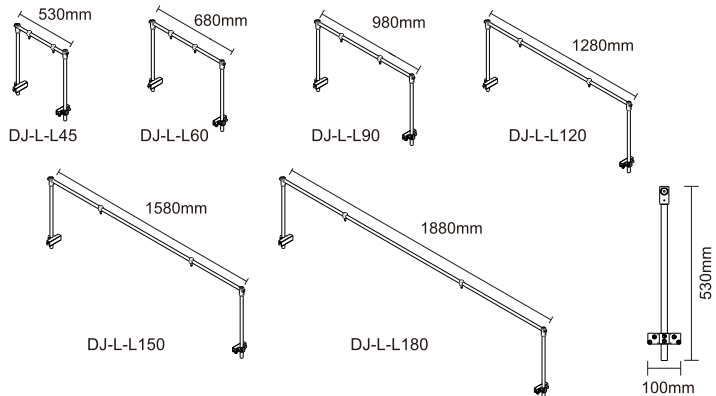

## △ 后背式不锈钢灯架型号/Back style bracket Model


产品名称 Product name	型号 Model	尺寸 Size	适用鱼缸 Tank size
后背式灯架45	DJ-H-H45	530x1200x320mm	40cm-45cm
后背式灯架60	DJ-H-H60	680x1200x320mm	60cm-70cm
后背式灯架90	DJ-H-H90	980x1200x320mm	90cm-100cm
后背式灯架120	DJ-H-H120	1280x1200x320mm	120cm-130cm
后背式灯架150	DJ-H-H150	1580x1200x320mm	150cm-160cm
后背式灯架180	DJ-H-H180	1880x1200x320mm	180cm-190cm

## △ 后背式不锈钢灯架尺寸/Size

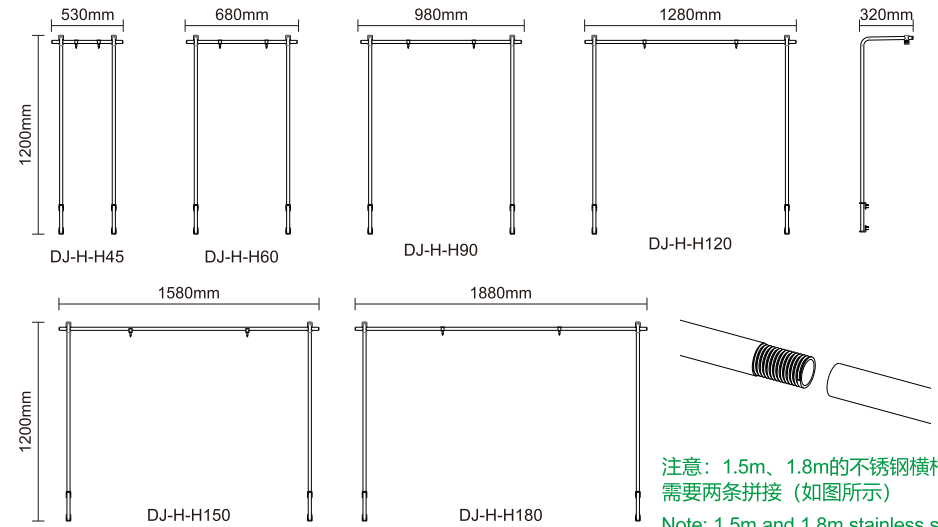

注意：1.5m、1.8m的不锈钢横杆  
需要两条拼接（如图所示）  
Note: 1.5m and 1.8m stainless steel cross bars need two splice (as shown in the picture)

## △ 后背式不锈钢灯架安装/Installation

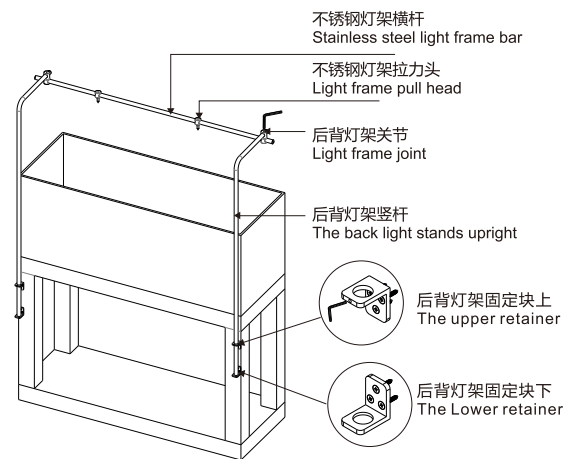

- 1.用螺丝固定好灯架固定块(按图示分好上下)
  - 2.装上后背灯架竖杆
  - 3.用六角扳手锁上机米螺丝固定好后背灯架竖杆
  - 4.装上后背灯架不锈钢灯架横杆
  - 5.用六角扳手上机米螺丝固定不锈钢灯架横杆
- 1.Screw the lamp holder retaining block(Divide up and down)  
2.Install the back light riser  
3.Use the Allen wrench to lock the Machine screws to fix the vertical rod of the back light frame  
4.Install a stainless steel rear light holder cross bar  
5.Secure the stainless steel light frame bar with the mechanical screw on the hex wrench

注意：建议木质底柜安装，铝合金或其他底柜需要打孔安装。  
Note: It is recommended to install wooden bottom cabinets, aluminum alloy or other bottom cabinets need to be drilled.