

△ 保修声明/Warranty Terms

一、对所售产品提供1年期免费质保,即1年内,如产品在质量问题,可免费更换维修。非质量问题及过保,所进行的维修更换将收取合理费用。

二、以下非本公司因素造成的产品问题均不在免费维修范围:

1. 未按说明书操作使用、电压不匹配、缺少必要的保养等;
2. 落水、受潮、未提供应有的工作环境的;
3. 人为因素所造成的产品损坏;
4. 非我司产品本身导致的故障;

由于国家或地区不同,部分权利可能只适用于特定客户。

I. The products sold are guaranteed for one year free of charge, that is, within one year, if there is any quality problem of the products, they can be replaced or repaired for free. A reasonable fee will be charged for maintenance and replacement of non-quality issues and after warranty overruns.

II. The following product problems not caused by the company are not covered by free maintenance:

1. Not operating according to the manual, voltage mismatch, lack of necessary maintenance, etc.;
2. Falling into the water, being exposed to moisture and failing to provide a proper working environment;
3. Product damage caused by human factors;
4. Failure not caused by our products; Depending on the country or region, some rights may only apply to specific customers.

△ 安全注意事项/Safety precautions

1. 本产品不具有防水功能。
2. 本产品环境使用温度,请保持在0~35℃的温度范围内。
3. 安装使用时,请不要过度用力或错误用力操作。
4. 严禁在电源不稳定的地方使用本产品。
5. 使用中和关闭电源后的短时间内表面温度较高,请勿随意触碰。
6. 严禁对电源线进行过度弯曲捆绑等。
7. 在开灯的状态下,请勿直视LED灯珠。
8. 开灯的时候,会出现短暂的延迟,此为正常现象。
9. 电子镇流器在使用时,会出现正常的工作音,此为正常现象。
10. 请注意保持灯具干净整洁,避免水渍腐蚀灯具。
11. 长时间不使用的情况下,请将其放置在干燥通风处。
12. 此灯具的光源是不可替换的;当光源到其寿终时,应替换整个灯具。
13. 此灯具的外部软缆或软线不能替换;如果软线损坏,该灯具即应报废。

1. This product is not waterproof.
2. Please keep the external operating temperature of this product within the range of 0 ~ 35°C.
3. During installation and use, please do not use excessive force or wrong force.
4. Please do not install it near other electrical appliances.
5. High surface temperature in a short period of time after use and power off. Do not touch it at will. Please wait for it to cool completely before carrying out relevant operation.
6. Excessive bending and binding of the power cord is strictly prohibited. If the power cord is damaged (exposed wire, broken wire, etc.), please stop using it immediately.
7. Do not look at the LED light directly when it's working.
8. Turn on the light, there will be a short delay, this is a normal phenomenon.
9. When the electronic ballast is working, there will be a little sound.
10. Please pay attention to keep the lamps and lanterns clean and tidy, water stains corrosion lamps and lanterns.
11. If it is not used for a long time, please place it in a dry and ventilated place.
12. The light source of this lamp is not replaceable; When the light source reaches the end of its life, the whole luminaire should be replaced.
13. The external cable or cord of the lamp cannot be replaced; If the cord is damaged, the lamp should be scrapped.

合格证
Certificate of
conformity

合格证作为售后保修唯一凭证,请保存好!
Certificate as after-sales warranty only credentials, please keep it good!

检验员/Inspector:

日期/Date:

保修记录


Records of the warranty

送修日期 Maintenance date:	故障及处理方法 Failure and treatment	取货日期 pickup date	顾客签名 Customer signature



WEEK AQUA V series 产品使用说明书 User Manual

专利号 Patent No.
ZL 2020 3 0192210.1

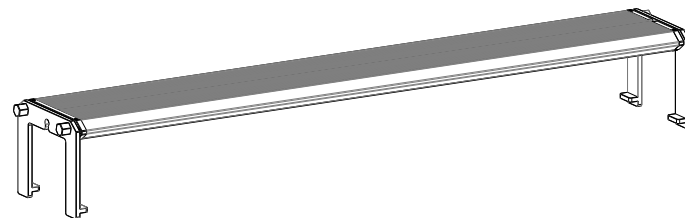

珠海威尔康光电有限公司

Zhuhai WEEK Photoelectric Co., Ltd.


- ① 广东省珠海市香洲区金鼎工业园金峰西路29号B栋3楼/1楼
② 3/F, Building B, No. 29 Jinfeng West Road, Jinding Industrial Park, Xiangzhou District, Zhuhai City
☎ +86 0756-3386506 ✉ Sales@weekaqua.com
🌐 www.weekaqua.com

△ 产品尺寸/Size


跨装 Standard style



水陆 Amphibious style

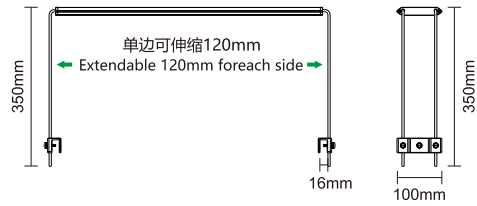


吊装 Pendant style

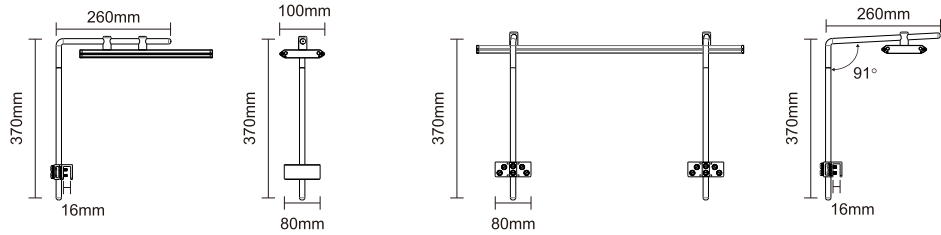

吊装型号: D1指单吊装, D2指双吊装


Pendant style: D1 refers to Single-Stand, D2 refers to double-Stand



伸缩杆固定螺丝, 安装时需保持水平垂直安装, 以免螺丝滑牙。
Bracket bar fixed screw, installation should be kept horizontal and vertical installation, to avoid screw sliding teeth.

调整合适位置后, 锁紧螺丝。
After adjusting the proper position, tighten the screw.


△ 安装示意图/Installation Diagram

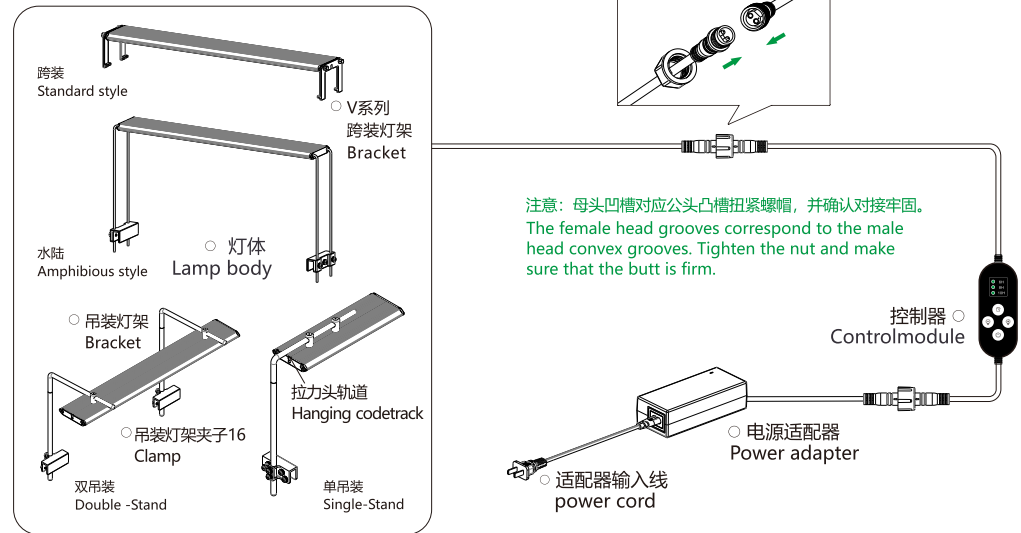

△ 产品型号/Model

跨装 Standard style	水陆 Amphibious style	吊装 Pendant style	功率 Power	光谱 Spectrum	输出电压 Output Voltage	输入电压 Voltage	光通量 Luminous Flux	灯珠数 LED Qty	灯体尺寸 Lamp Dimension
V200K	V200S	V200D1	12W	W	24V 1A	AC100-240V	960lm	28(2835)	196*100*18mm
V300K	V300S	V300D1	18W	W	24V 1A	AC100-240V	1440lm	49(2835)	296*100*18mm
V400K	V400S	V400D1	24W	W	24V 1A	AC100-240V	1920lm	63(2835)	396*100*18mm
V450K	V450S	V450D1	28W	W	24V 2A	AC100-240V	2240lm	70(2835)	446*100*18mm
V600K	V600S	V600D2	36W	W	24V 2A	AC100-240V	2880lm	91(2835)	596*100*18mm
V800K	V800S	V800D2	48W	W	24V 2A	AC100-240V	3840lm	126(2835)	796*100*18mm
V900K	V900S	V900D2	54W	W	24V 3A	AC100-240V	4320lm	140(2835)	896*100*18mm
V1200K	V1200S	V1200D2	72W	W	24V 3A	AC100-240V	5760lm	182(2835)	1196*100*18mm
V200K WRGB	V200S WRGB	V200D1 WRGB	12W	WRGB	24V 1A	AC100-240V	780lm	28(2835)	196*100*18mm
V300K WRGB	V300S WRGB	V300D1 WRGB	18W	WRGB	24V 1A	AC100-240V	1170lm	49(2835)	296*100*18mm
V400K WRGB	V400S WRGB	V400D1 WRGB	24W	WRGB	24V 1A	AC100-240V	1560lm	63(2835)	396*100*18mm
V450K WRGB	V450S WRGB	V450D1 WRGB	28W	WRGB	24V 2A	AC100-240V	1820lm	70(2835)	446*100*18mm
V600K WRGB	V600S WRGB	V600D2 WRGB	36W	WRGB	24V 2A	AC100-240V	2340lm	91(2835)	596*100*18mm
V800K WRGB	V800S WRGB	V800D2 WRGB	48W	WRGB	24V 2A	AC100-240V	3120lm	126(2835)	796*100*18mm
V900K WRGB	V900S WRGB	V900D2 WRGB	54W	WRGB	24V 3A	AC100-240V	3510lm	140(2835)	896*100*18mm
V1200K WRGB	V1200S WRGB	V1200D2 WRGB	72W	WRGB	24V 3A	AC100-240V	4680lm	182(2835)	1196*100*18mm

△ 光谱/Spectrum

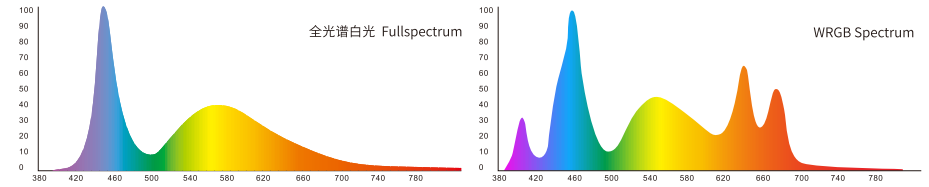

△ 调光定时功能说明/Timing&Dimming Function Description

1、一键开关: 灯具开关。

注意: 插拔电源线会重置灯具, 重置后灯具需再次设置定时时间, 且重新通电开启时亮度为100%;

2、无极调光设置: 按住亮度“减弱”按钮, 亮度由100%→1%, 按住亮度“增加”按钮, 亮度由1%→100%, 适当亮度松开即可。

3、定时功能设置: 选择对应时长 (6h、8h、10h) 自动熄灭, 并于次日相同设置时间灯具自动开启, 记忆循环。

(例: 早上8:00选择定时10小时, 则晚上18:00自动熄灭, 次日早上8:00自动开启, 记忆循环。注意: 请勿断电。

注意: 因元器件精度误差3%, 所以灯具开关时间可能会有几分钟的偏差, 属正常现象。


1. Switch setting: Put the Switch button to Turn on/off the light, if pull off the power the light will need to be reset the timer&dimming, and the brightness is 100%.

2. Stepless dimming setting: press and hold the "-" button or reduce the brightness from 100% to 1%, and press and hold the "+" button to increase the brightness from 1% to 100%, then release the appropriate brightness.

3. Timmer Setting: It's use cycle timer, select the time 6H/8H/10H/12H which is needed, it will be turn on/off automatically at the same setting time in the next day.

(Forexample: turn on the light on 8:00 am and set 12hrs, it will be turn off on 8:00 pm, and it will be repeat everyday, except the power off).


Note: Due to the accuracy error of components of 3%, so the lamp switching time may have a few minutes of deviation, is a normal phenomenon.



△ 挡光板安装图/Screen Installation Drawing

挡光板非标配, 需单独购买

Lamp Shade is not standard and must be purchased separately

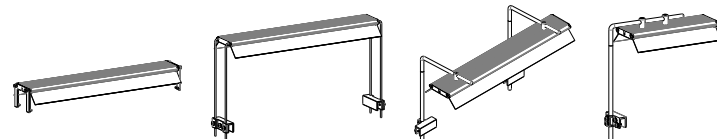

插入挡光板, 用6角扳手扭紧螺丝。
可调节挡光板角度。

Insert the light shield and tighten the screws with a 6-angle wrench. Adjustable light shield Angle.