⚠ 保修声明/Warranty Terms

- 在质量问题,可免费更换维修。非质量问题及过保,所 进行的维修更换将收取合理费用。
- 二、以下非本公司因素造成的产品问题均不在免费维修 范围:
- 1. 未按说明书操作使用、电压不匹配、缺少必要的保养
- 2. 落水、受潮、未提供应有的工作环境的;
- 3. 人为因素所造成的产品损坏;
- 4. 非我司产品本身导致的故障;

由于国家或地区不同,部分权利可能只适用于特定客 户。

- 一、对所售产品提供1年期免费质保,即1年内,如产品存 I. The products sold are guaranteed for one year free of charge, that is, within one year, if there is any quality problem of the products, they can be replaced or repaired for free. A reasonable fee will be charged for maintenance and replacement of non-quality issues and after warranty
 - II . The following product problems not caused by the company are not covered by free maintenance:
 - 1. Not operating according to the manual, voltage mismatch, lack of necessary maintenance, etc.;
 - 2. Falling into the water, being exposed to moisture and failing to provide a proper working environment;
 - 3. Product damage caused by human factors;
 - 4. Failure not caused by our products; Depending on the country or region, some rights may only apply to specific customers.

⚠ 安全注意事项/Safety precautions

- 1. 本产品不具有防水功能。
- 2. 本产品环境使用温度,请保持在0~35℃的温度范围
- 3. 安装使用时, 请不要过度用力或错误用力操作。
- 4. 严禁在电源不稳定的地方使用本产品。
- 5.使用中和关闭电源后的短时间内表面温度较高,请勿随
- 6. 严禁对电源线进行过度弯曲捆绑等。
- 7. 在开灯的状态下,请勿直视led灯珠。
- 8. 开灯的时候,会出现短暂的延迟,此为正常现象。
- 9. 电子镇流器在使用时,会出现正常的工作音,此为正常 现象。
- 10. 请注意保持灯具干净整洁,避免水渍腐蚀灯具。
- 11.长时间不使用的情况下, 请将其放置在干燥通风处 12.此灯具的光源是不可替换的; 当光源到其寿终时, 应替换整个灯具。
- 13.此灯具的外部软缆或软线不能替换;如果软线损 坏, 该灯具即应报废。

- 1. This product is not waterproof.
- 2. Please keep the external operating temperature of this product within the range of $0 \sim 35$ °C.
- 3. During installation and use, please do not use excessive force or wrong
- 4. Please do not install it near other electrical appliances.
- 5. High surface temperature in a short period of time after use and power off.Do not touch it at will. Please wait for it to cool completely before carry ing out relevant operation
- 6. Excessive bending and binding of the power cord is strictly prohibited. If the power cord is damaged (exposed wire, broken wire, etc.), please stop using it immediately.
- 7.Do not look at the led light directly when it's working
- 8.Turn on the light, there will be a short delay, this is a normal phenomenon.
- 9. When the electronic ballast is working there will be have a little sound.
- 10, Please pay attention to keep the lamps and lanterns clean and tidy, water stains corrosion lamps and lanterns.
- 11. If it is not used for a long time, please place it in a dry and ventilated
- 12. The light source of this lamp is not replaceable; When the light source reachestheendofitslife, the whole luminaire should be replaced.
- 13. The external cable or cord of the lamp cannot be replaced; If the cordisdamaged, the lampshould be scrapped.

合格证 Certificate of conformity

合格证作为售后保修唯一凭证,请保存好!

Certificate as after-sales warranty only credentials, please keep it good!

检验员/Inspector: 日期/Date:

保修记录 Records of the warranty

送修日期 Maintenance date:	故障及处理方法 Failure and treatment	取货日期 pickup date	顾客签名 Customer signature



WEEK AQUA

S series 产品使用说明书 **User Manual**

专利号Patent No. ZL 2019 3 0353342.5



珠海威尔康光电有限公司

Zhuhai WEEK Photoelectric Co., Ltd.

- 广东省珠海市香洲区金鼎工业园金峰西路29号B栋3楼/1楼
- () 3/F, Building B, No. 29 Jinfeng West Road, Jinding Industrial Park, Xiangzhou District, Zhuhai City


- www.weekagua.com

⚠ 产品型号/Model

型号 Model	功率 Power	光谱 Spectrum	灯珠数 LED Qty	光通量 Luminous Flux	输出电压 Output Voltage	输入电压 Voltage	灯体尺寸 Lamp Dimension
S300	18W	RGB	21	810lm	24V 1A	AC100-240V	321*100*18mm
S400	24W	RGB	28	1080lm	24V 1A	AC100-240V	421*100*18mm
S450	28W	RGB	35	1260lm	24V 2A	AC100-240V	471*100*18mm
S300 Pro	20W	RGB+UV	20+10	1100lm	36V 1A	AC100-240V	321*100*18mm
S400 Pro	25W	RGB+UV	30+10	1375lm	36V 1A	AC100-240V	421*100*18mm
S450 Pro	30W	RGB+UV	30+10	1650lm	36V 1A	AC100-240V	471*100*18mm

① 产品尺寸/Size


S系列



🗥 安装示意图/installation Diagram

1.S系列 APP版 /S series APP control version

S300 Pro、S400 Pro、S450 Pro

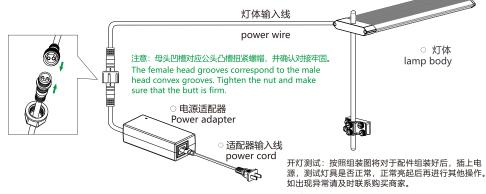

配件清单/Accessories list:


灯体*1 lamp body*1 jower adapter*1 jower cord*1 s系列支架*1 bracket*1 s系列夹子9*1 clip*1 O型圈*1 o-rings * 1

塑料螺钉(长)*4 Plastic screw (Long) * 4 塑料螺钉(短)*2 Plastic screw (Short) * 2


说明书*1 User Manual * 1



According to the assembly diagram, after the parts are assembled, plug in the power, test whether the lamps are normal, and then carry out other operations after they are normally lit. In case of any abnormality, please contact the purchasing merchant in time.




♠ 安装示意图/Installation Diagram

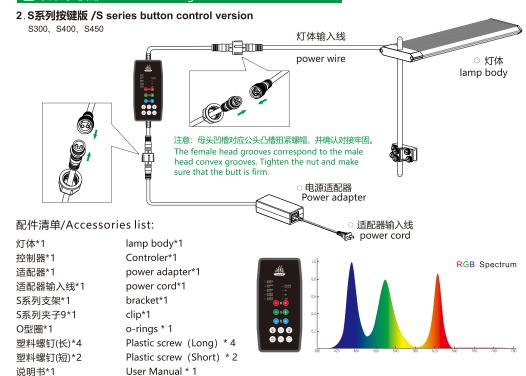

⚠ 高度调节操作说明/Height Adjustment Operation Instructions





扭开螺钉上下拉动灯架可 以调节灯具高度


The height of lamps and lanterns can be adjusted by pulling the screw up and down

适用于9mm以内厚度 Suitable for thickness up to 9mm

from side to side. ① 挡光板安装图/Screen Installation Drawing

挡光板非标配,需单独购买

Lamp Shade is not standard and must be purchased separately





插入挡光板,用6角扳手扭紧螺丝。可调节挡光板角度。

Insert the light shield and tighten the screws with a 6-angle wrench. Adjustable light shield Angle.