⚠ 保修声明/Warranty Terms

- 在质量问题,可免费更换维修。非质量问题及过保,所 讲行的维修更换将收取合理费用。
- 二、以下非本公司因素造成的产品问题均不在免费维修 范围:
- 1. 未按说明书操作使用、电压不匹配、缺少必要的保养 等:
- 2. 落水、受潮、未提供应有的工作环境的;
- 3. 人为因素所造成的产品损坏;
- 4. 非我司产品本身导致的故障;

由于国家或地区不同,部分权利可能只适用于特定客 È.

- 一、对所售产品提供1年期免费质保,即1年内,如产品存 I. The products sold are guaranteed for one year free of charge, that is, within one year, if there is any quality problem of the products, they can be replaced or repaired for free. A reasonable fee will be charged for maintenance and replacement of non-quality issues and after warranty
 - II . The following product problems not caused by the company are not covered by free maintenance:
 - 1. Not operating according to the manual, voltage mismatch, lack of necessary maintenance, etc.;
 - 2. Falling into the water, being exposed to moisture and failing to provide a proper working environment;
 - 3. Product damage caused by human factors:
 - 4. Failure not caused by our products; Depending on the country or region, some rights may only apply to specific customers.

⚠ 安全注意事项/Safety precautions

- 1. 本产品不具有防水功能。
- 2. 本产品环境使用温度,请保持在0~35℃的温度范围
- 3. 安装使用时, 请不要过度用力或错误用力操作。
- 4. 严禁在电源不稳定的地方使用本产品。
- 5.使用中和关闭电源后的短时间内表面温度较高,请勿随 意触碰。
- 6. 严禁对电源线进行过度弯曲捆绑等。
- 7. 在开灯的状态下,请勿直视led灯珠。
- 8. 开灯的时候,会出现短暂的延迟,此为正常现象。
- 9. 电子镇流器在使用时,会出现正常的工作音,此为正常 现象。
- 10. 请注意保持灯具干净整洁,避免水渍腐蚀灯具。
- 11.长时间不使用的情况下, 请将其放置在干燥通风处 12.此灯具的光源是不可替换的; 当光源到其寿终时, 应替换整个灯具。
- 13.此灯具的外部软缆或软线不能替换;如果软线损 坏,该灯具即应报废。

- 1. This product is not waterproof.
- 2. Please keep the external operating temperature of this product within the range of $0 \sim 35^{\circ}$ C.
- 3. During installation and use, please do not use excessive force or wrong
- 4. Please do not install it near other electrical appliances.
- 5. High surface temperature in a short period of time after use and power off.Do not touch it at will. Please wait for it to cool completely before carry ing out relevant operation
- 6. Excessive bending and binding of the power cord is strictly prohibited.If the power cord is damaged (exposed wire, broken wire, etc.), please stop using it immediately.
- 7.Do not look at the led light directly when it's working .
- 8.Turn on the light, there will be a short delay, this is a normal
- 9. When the electronic ballast is working there will be have a little sound .
- 10, Please pay attention to keep the lamps and lanterns clean and tidy, water stains corrosion lamps and lanterns.
- 11. If it is not used for a long time, please place it in a dry and ventilated
- 12. The light source of this lamp is not replaceable; When the light source reachestheendofitslife.thewholeluminaireshouldbereplaced.
- 13. The external cable or cord of the lamp cannot be replaced; If the cordis damaged, the lamps hould be scrapped.

Certificate of conformity

合格证作为售后保修唯一凭证,请保存好!

Certificate as after-sales warranty only credentials, please keep it good!

检验员/Inspector: 日期/Date:

保修记录 Records of the warranty

送修日期 Maintenance date:	故障及处理方法 Failure and treatment	取货日期 pickup date	顾客签名 Customer signature




WEEK AQUA

T12观赏鱼增艳培育灯

T12 Tube Ornamental fish brighten Cultivation lamp

产品使用说明书 User Manual

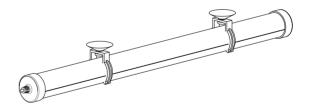

珠海威尔康光电有限公司


Zhuhai WEEK Photoelectric Co., Ltd.

- 广东省珠海市香洲区金鼎工业园金峰西路29号B栋3楼/1楼
- (9) 3/F, Building B, No. 29 Jinfeng West Road, Jinding Industrial Park, Xiangzhou District, Zhuhai City
- www.weekagua.com

⚠ 产品型号/Model

型号 Model	功率 Power	适用鱼缸 Tank size	灯珠数 LED Qty	光通量 Luminous Flux	输出电压 Output Voltage	输入电压 Voltage	灯体尺寸 Lamp Dimension
T12-56	18W	60cm-70cm	RGB:24 UV :6 WW :24 W :24 CW :24	1170lm	24V 1A	AC100-240V	ф42*560mm
T12-76	24W	80cm-110cm	RGB:30 UV :6 WW:30 W :30 CW :30	1560lm	24V 2A	AC100-240V	ф42*760mm
T12-116	36W	120cm-140cm	RGB:48 UV :6 WW:48 W :48 CW :48	2340lm	24V 2A	AC100-240V	ф42*1160mm
T12-146	48W	150cm-170cm	RGB:60 UV :6 WW :60 W :60 CW :60	3120lm	24V 2.5A	AC100-240V	ф42*1460mm


⚠ 安装示意图/Installation diagram

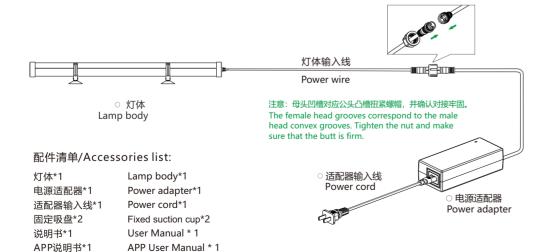


⚠ 产品尺寸/Size

⚠ 光谱/Spectrum


T12-56

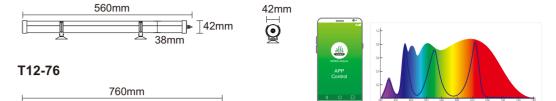



T12-116



T12-146







俯视图 Top View

侧视图 Side View





左视图 Left View

侧视图 Side View